

1. GENERAL NOTES:
REFER TO APPLICABLE FORTIFIED HOME STANDARDS FOR ADDITIONAL INFORMATION. REFER TO FORTIFIED STANDARD DETAIL F-C-1 FOR CORROSION PROTECTION REQUIREMENTS.
2. APPLICABLE FOR ROOF PITCH 2:12 OR GREATER.
3. FORTIFIED HOME STANDARDS ARE TO BE APPLIED IN CONJUNCTION WITH FEDERAL, STATE, AND LOCAL CODES, ORDINANCES AND REGULATIONS IN ADDITION TO THE STRUCTURAL DESIGN WHICH IS BY OTHERS. IN CASE OF A CONFLICT BETWEEN PROVISIONS, USE WHICHEVER IS MORE STRINGENT.
- 4.



AT RAKES, DRIP EDGE INSTALLED OVER ANCHOR SHEET AND CAP SHEET PER FORTIFIED STANDARD DETAILS F-DE-1 OR F-DE-3.

ANCHOR SHEET INSTALLED IN ACCORDANCE WITH FORTIFIED STANDARD DETAIL F-SRD-5.

TILE CAP SHEET INSTALLED IN ACCORDANCE WITH FORTIFIED STANDARD DETAIL F-SRD-5.

AT EAVES, DRIP EDGE INSTALLED OVER ANCHOR SHEET PER FORTIFIED STANDARD DETAILS F-DE-1 OR F-DE-3 BUT UNDER CAP SHEET AS SHOWN.

METAL DRIP EDGE (CODE-COMPLIANT, MINIMUM GAUGE) ALONG ALL EAVES AND GABLE RAKE EDGES INSTALLED OVER UNDERLAYMENT. MAKE SURE THE TOP SURFACE OF THE DRIP EDGE IS CLEAN, FREE OF OIL, AND IF REQUIRED BY THE MEMBRANE MANUFACTURER, PRIMED WITH ASTM D41 PRIMER. REFER TO FORTIFIED STANDARD DETAILS F-DE-1 OR F-DE-3 FOR INSTALLATION OF DRIP EDGE.

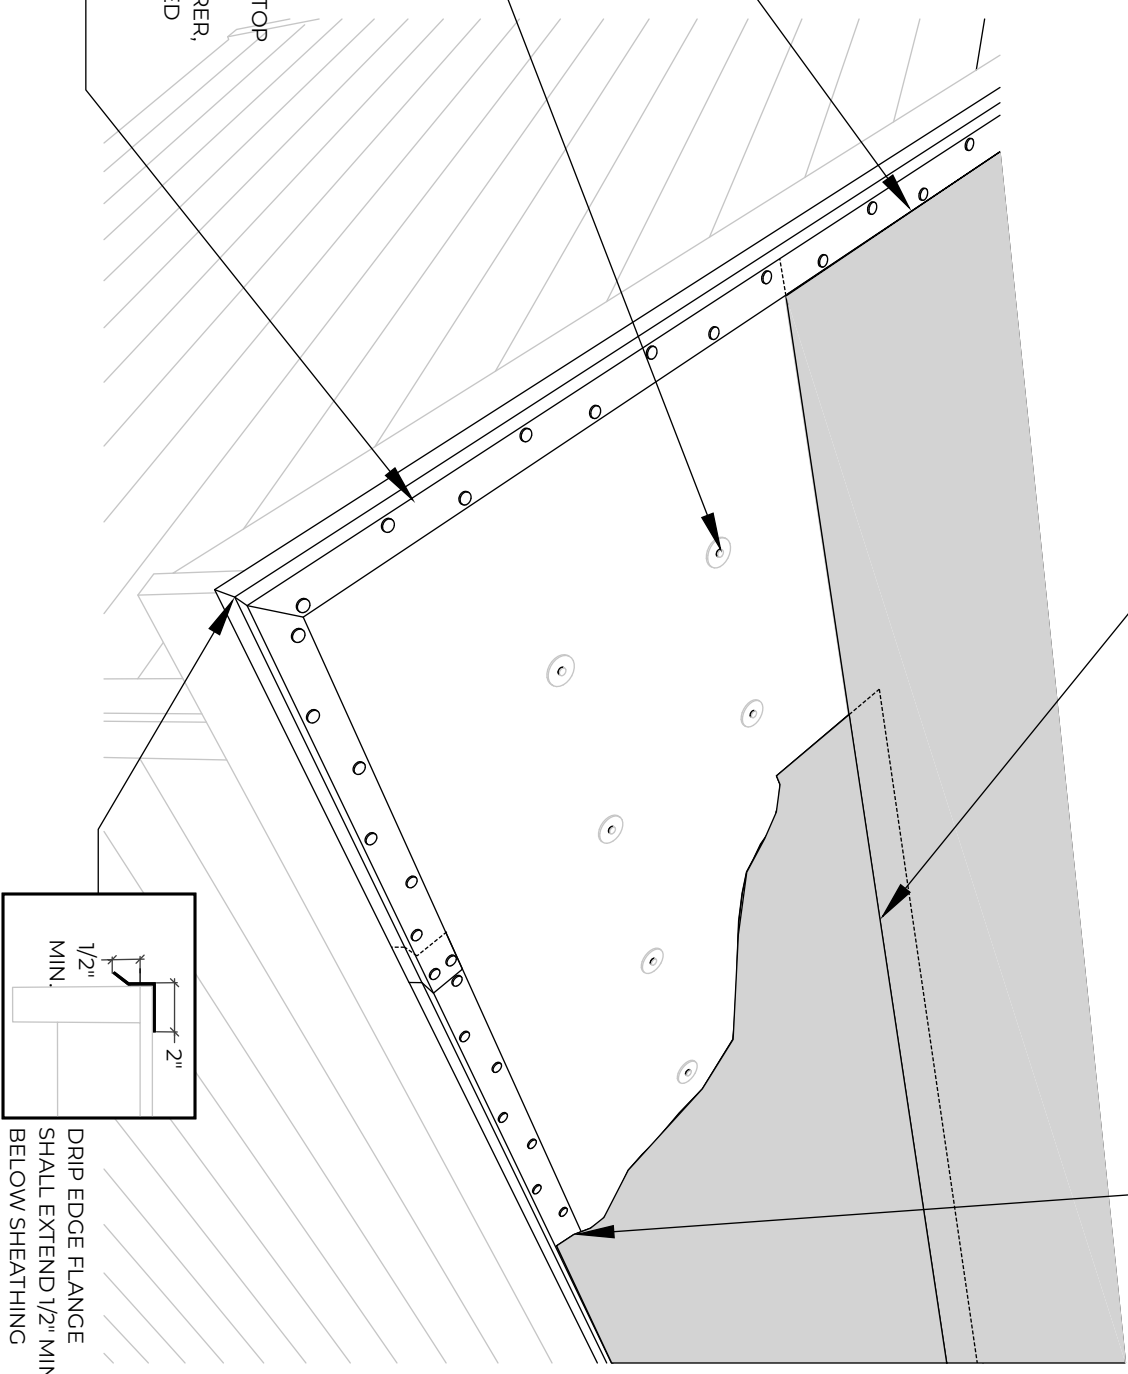

DRIP EDGE FLANGE SHALL EXTEND 1/2" MIN. BELOW SHEATHING

APPLICABLE STANDARDS:

FORTIFIED HOME™ - HURRICANE (2019)
FORTIFIED HOME™ - HIGH WIND (2015)

DESCRIPTION:

DRIP EDGE INSTALLATION OVER ANCHOR SHEET AND UNDER CAP SHEET FOR CONCRETE AND CLAY TILE ROOF COVERS

DRAWING #:

F-DE-2

DATE:

11/18/2019

